

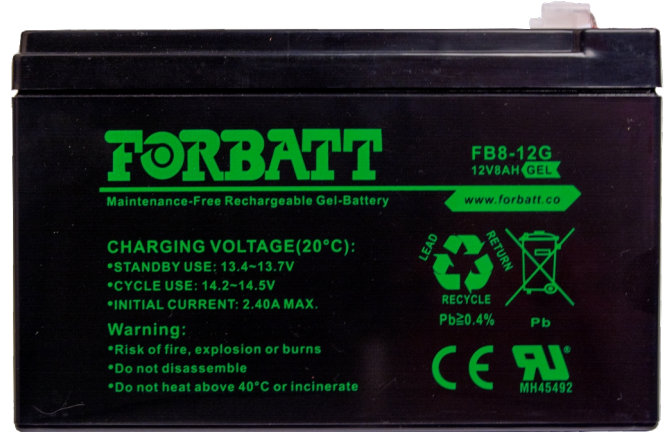
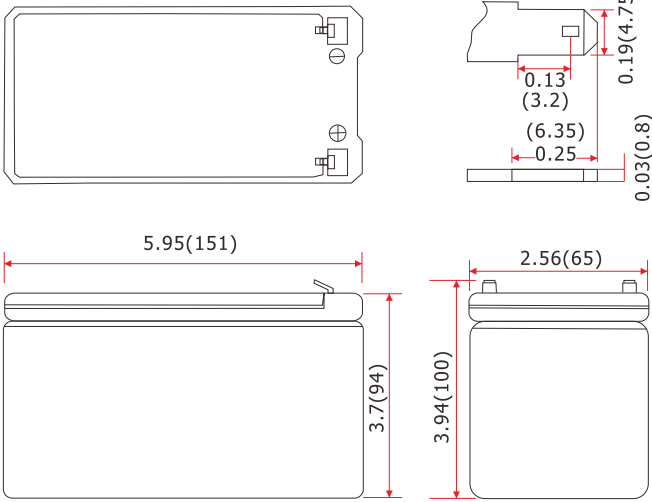


Unit: inch(mm)

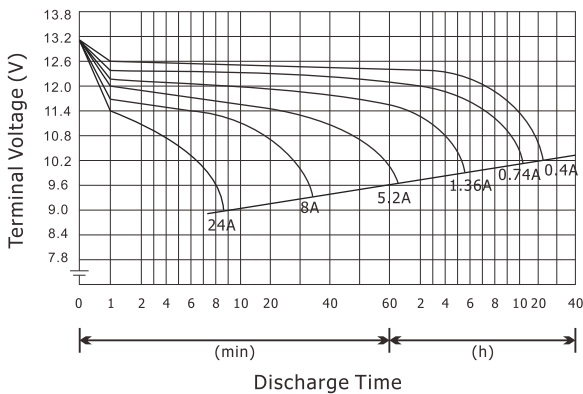

Discharge Current and Discharge Duration Time

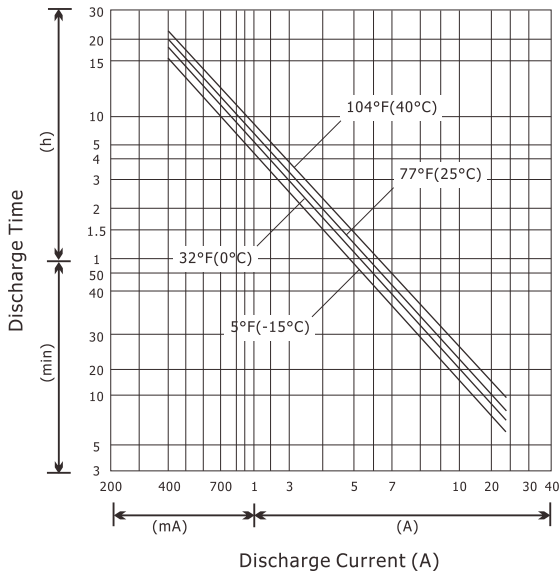

Specification

Nominal Voltage	12V	
Rated Capacity (20hr Rate)	8Ah	
Dimensions	Length	5.94inches (151mm)
	Width	2.56inches (65mm)
	Height	3.70inches (94mm)
	Total Height	3.94inches (100mm)
Weight	Approx. 5.07lbs (2.30kg)	
Characteristics		
Capacity 77°F(25°C)	20hour rate (0.40A)	8.0Ah
	10hour rate (0.73A)	7.3Ah
	5hour rate (1.36A)	6.8Ah
	1hour rate (5.2A)	5.2Ah
Internal Resistance	Full Charged, 77°F(25°C)	23mΩ
Capacity Affected By Temperature (10hr Rate)	104°F(40°C)	102%
	77°F(25°C)	100%
	32°F(0°C)	85%
	5°F(-15°C)	65%
Self-Discharge 77°F(25°C)	Capacity after 3 month storage	90%
	Capacity after 6 month storage	85%
	Capacity after 9 month storage	65%
Charge (Constant Voltage)	Initial Charge Current "LESS" than 2.40A	
	Cycle	14.2-14.5V/77°F(25°C)
	Stand By	13.4-13.7V/77°F(25°C)

**These data are average values obtained from three Charge/Discharge cycles. Note: These are NOT minimum values.


Constant Current Discharge Characteristics Unit: A (25°C / 77°F)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	5HR	8HR	10HR	20HR
9.6V	29.9	20.6	15.7	9.68	5.60	3.11	2.32	1.48	0.98	0.81	0.43
10.0V	27.7	19.4	14.9	9.36	5.52	3.05	2.28	1.46	0.96	0.79	0.42
10.2V	26.6	18.9	14.6	9.28	5.44	3.01	2.27	1.45	0.95	0.78	0.41
10.5V	24.4	17.7	14.0	9.04	5.32	2.99	2.23	1.43	0.94	0.77	0.40
10.8V	22.1	16.4	13.1	8.72	5.20	2.94	2.18	1.40	0.92	0.76	0.39
11.1V	19.3	14.8	12.1	8.24	5.08	2.90	2.12	1.36	0.90	0.75	0.38


Constant Power Discharge Characteristics Unit: W (25°C / 77°F)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	5HR	8HR	10HR	20HR
9.6V	321	227	177	109	64.2	35.9	26.3	17.3	11.4	9.36	4.88
10.0V	295	212	167	106	62.8	35.2	26.1	17.1	11.3	9.20	4.84
10.2V	281	206	162	104	62.2	34.5	25.6	16.8	11.2	9.12	4.80
10.5V	259	193	154	101	61.1	33.7	24.5	16.6	11.1	9.04	4.76
10.8V	234	178	145	97	59.6	33.3	24.1	16.2	10.8	8.88	4.72
11.1V	208	161	135	93	58.1	32.8	23.8	15.8	10.5	8.72	4.56


Trickle / Float Service Life

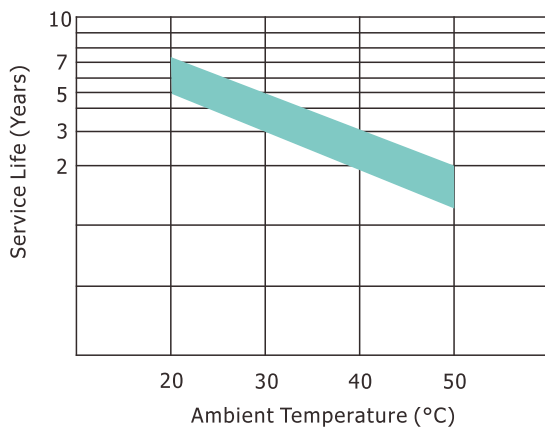

Effect of Temperature on Capacity

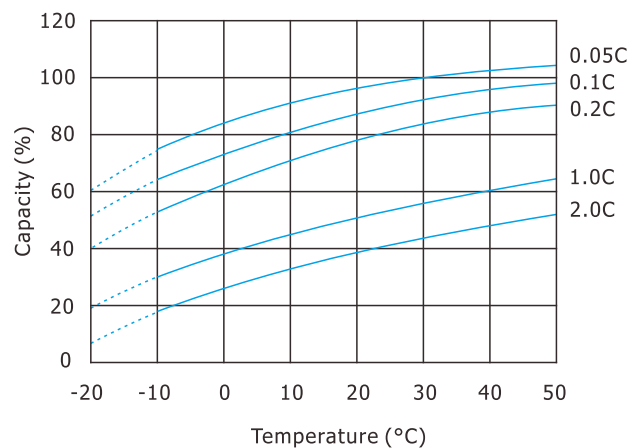

Cycle Service Life (@25°C/77°F)

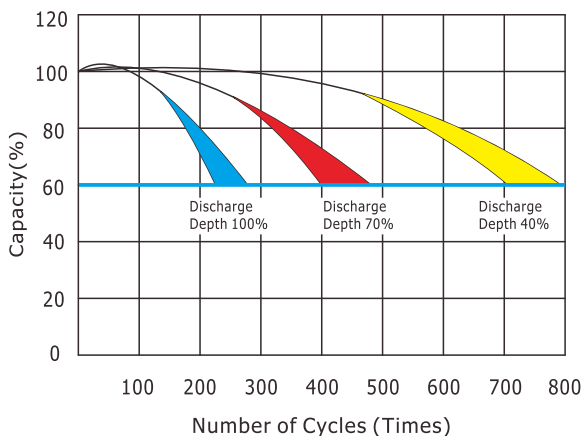

Capacity Retention Characteristic

